


SPOTLIGHT

SYRIOS FAMILY *Luminis*

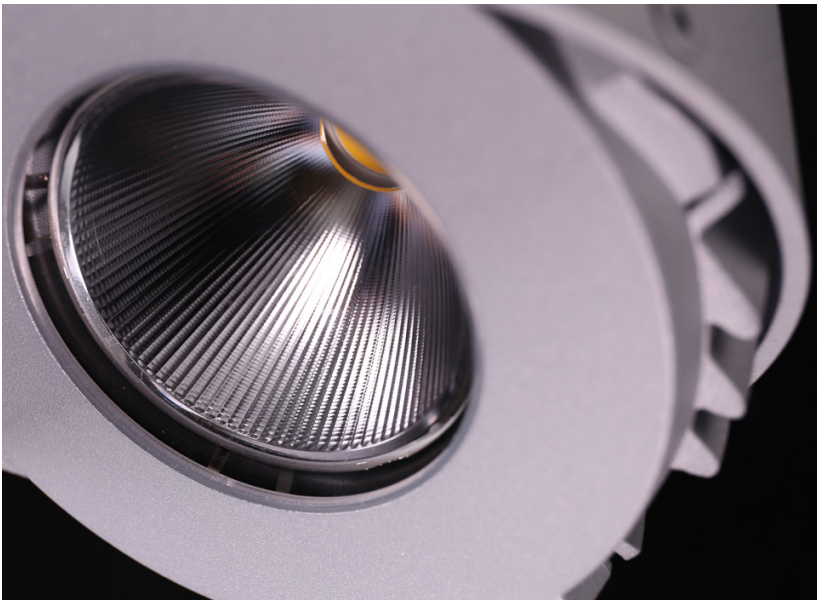

SYRIOS

A360 option

A new level of adjustability

Architectural Products magazine Product Innovation Award (PIA) award winning fixture in 2015

The Syrios collection from Luminis is a complete family for a variety of applications. Available in both square and round forms, and in housings ranging from 4" to 8" in diameter, the Syrios has been adapted to be suitable for any project.

The Syrios is built for long-lasting power in-field. The seamless extruded aluminum housing is built as corrosion resistance 256 aluminum alloy and stainless steel hardware, and features an integral LED sealed module designed for optimal heat dissipation, as well as powerful lighting performance. The fixture itself is available as a wall, pendant and surface ceiling mount configuration, and is available with an adjustable beam direction and rotation in the 6" and 8" versions.

The Syrios provides long-lasting, beautiful illumination. The fixture is available 3000k, 3500k and 4000k in 80CRI, or 3000k in 90 CRI, and has an L70 lifetime of 130,000 hours. The large range of fixture sizes allow for illuminations ranging from 1,100 lumens up to 9,500 lumens. The family of fixtures is dimmable VIA 0-10V dimming, and has some RGBW versions that are DMX controllable.



LUMEN BREAKDOWN, ROUND

3" Fixture

WALL (Up or Down): SY300 (1,100 lumens)

WALL (Up/Down): SY302 (1,900 lumens)

PENDANT (Down): SY305 (1,100 lumens)

PENDANT (Up/Down): SY306 (1,900 lumens)

SURFACE: (Down): SY310 (1,100 lumens)

6" Fixture

WALL (Up or Down): SY600 (1,100-3,200 lumens)

WALL (Up/Down): SY602 (2,100-5,000 lumens)

PENDANT (Down): SY605 (1,100-3,200 lumens)

WALL (Up/Down): SY606 (2,100-5,000 lumens)

SY610 (1,100-3,200 lumens)

8" Fixture


WALL (Up or Down): SY800 (1,900-5,600 lumens)

WALL (Up/Down): SY802 (3,500-9,500 lumens)

PENDANT (Down): SY805 (1,900-5,600 lumens)

WALL (Up/Down): SY806 (3,500-9,500 lumens)

SURFACE: (Down): SY810 (1,900-5,600 lumens)

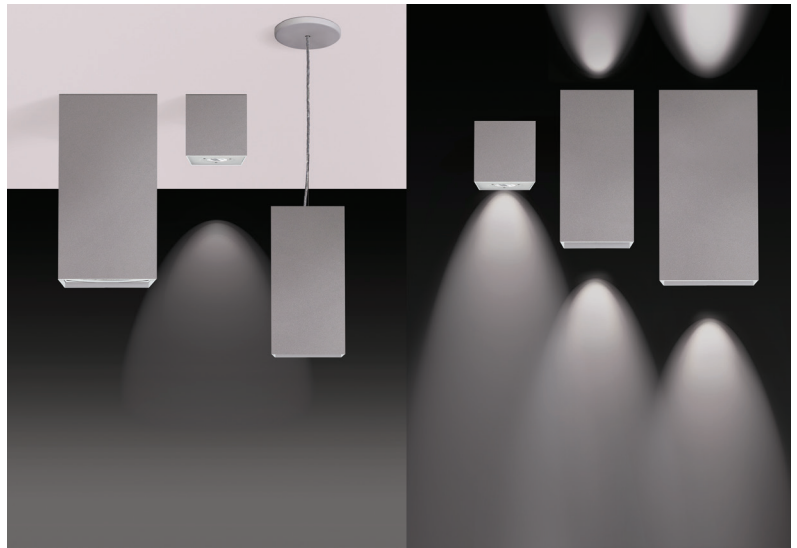

LUMEN BREAKDOWN, SUQARE

4" Fixture

PENDANT (Down): SQ405 (1,100 lumens)

5" Fixture

WALL (Up or Down): SQ500 (1,100 lumens)

WALL (Up/Down): SQ502 (1,900 lumens)

SURFACE: (Down): SQ510 (1,100 lumens)

6" Fixture

WALL (Up or Down): SQ600 (1,100-3,200 lumens)

WALL (Up/Down): SQ602 (2,100-5,000 lumens)

PENDANT (Down): SQ605 (1,100-3,200 lumens)

SURFACE: (Down): SQ610 (1,100-3,200 lumens)

8" Fixture

WALL (Up or Down): SQ800 (1,900-5,600 lumens)

WALL (Up/Down): SQ802 (3,500-9,500 lumens)

PENDANT (Down): SQ805 (1,900-5,600 lumens)

SURFACE: (Down): SQ810 (1,900-5,600 lumens)

